




For installation information please refer to the tooling overview and manuals on our website.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Countersunk head	Tête fraisée	Senkkopf	Testa svasata	Cabeza avellanada
Body: Steel* Zinc plated Clear trivalent chromated	Corps: Acier* Revêtement zingué Passivation claire trivalente	Hülse: Stahl* verzinkt Klar chromatiert, Cr6-frei	Corpo: Acciaio* Zincati Passivazione chiara trivalente	Cuerpo: Acero* Zincado Pasivado claro trivalente
Stem: Steel* Zinc plated Clear trivalent chromated	Tige: Acier* Revêtement zingué Passivation claire trivalente	Dorn: Stahl* verzinkt Klar chromatiert, Cr6-frei	Gambo: Acciaio* Zincati Passivazione chiara trivalente	Vástago: Acero* Zincado Pasivado claro trivalente

*: BS 3111 Type 1 SAE 1038

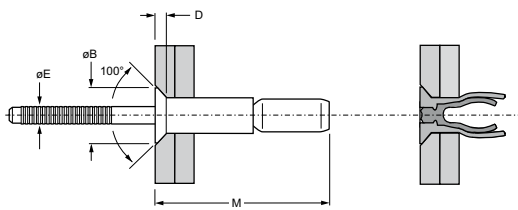

ø	Cross-section		Cross-section		M	øB	D	øE	Tensile strength		Shear strength		Part No/ref
	min.	max.	min.	max.					min.	typ. ¹⁾	min.	typ. ¹⁾	
4.8 (3/16")	3.18	8.41	4.85	5.10	20.14	8.76	1.78	3.10	5.78	7.34	4.00	4.45	SSCI-06-06
6.4 (1/4")	4.32	12.07	6.63	7.01	28.32	10.54	2.01	4.11	10.67	12.45	8.22	9.56	SSCI-08-08

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / valores típicos