


# Briv® 1841



For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Austenitic stainless steel*	Inox austénitique*	Edelstahl*	Acciaio inox austenitico*	Acero inoxidable austenítico*
Polished	Poli	Blank	Lucido	Pulido

\*: BS 3111 394S17 Werkstoff 1.4567

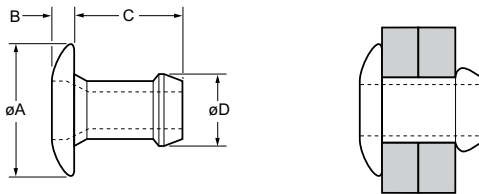

ø	Ø		Ø		± 0.4	B	C	øD	kN <sup>1)</sup>	kN <sup>1)</sup>	Fasteners per pod/ Nombre de rivets par chargeur / Niete pro Magazin / Rivetti per caricatore / Uds./carga	Part No/ref
	min.	max.	min.	max.								
3.2 (1/8")	1.14	2.42	3.27	3.34	6.2	0.99	4.37	3.16	1.3	2.0	58	01841-00404
	2.15	3.43					5.39				50	01841-00406
	3.17	4.45					6.41				42	01841-00408
	4.19	5.47					7.42				37	01841-00410
	5.20	6.48					8.44				33	01841-00412
4,0 (5/32")	1.57	2.93	3.97	4.04	7.9	0.99	4.91	3.87	2.4	3.5	52	01841-00505
	2.15	3.43					5.41					01841-00506
	2.66	3.94					5.92				44	01841-00507
	3.68	4.96					6.94				38	01841-00509
	4.69	5.97					7.95				34	01841-00511
	5.71	6.99					8.97				30	01841-00513
4.8 (3/16")	2.03	3.94	4.85	4.93	9.4	1.17	6.10	4.77	3.5	5.1	42	01841-00607
	3.68	5.21					7.37				35	01841-00609
	4.32	5.84					8.00				32	01841-00610
	4.95	6.48					8.64				31	01841-00611
	6.22	7.75					9.91				27	01841-00613
	7.49	9.02					11.18				24	01841-00615

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas